

NSC-3622

Key Features

Conference : Conference: 'talk' with your surveillance camera by mobile, video or soft phone...

Home Security: DICO / Motion Detection and Video Recording

Remote Monitoring: Bank / Nursing Home / Kindergarten

Surveillance: Pan / Tilt / Zoom / Auto Cruise / Auto Pan / Schedule Recording / Emergency Out-going Call

Tele-care: Remote Health Diagnosis by On-line doctor / on-spot First Aid Instruction

Distance Learning: Live Broadcast of On-line Tutor



Applications

Home users: baby monitoring, home surveillance, neighborhood watch.

Industrial location: Warehouse, laboratory, gas station.

Public works: traffic load, streets, park.

Sightseeing spots: Tourist attractions, Theme Parks.

Enterprise: Convenient / Chain Stores, factory production line, ATM, Bank.

Schools: Playground, Campus surveillance.

Medical: Hospital, Medical care center.



Leadtek surveillance Pan/Tilt/Zoom camera provides a flexible remote camera movement control interface. Users can define preferred 16 preset positions. Those preset positions can be grouped into cruise or pan sequence. Users can define 5 'camera cruise and turn' on the camera auto cruise based on the preferred surveillance interval. Users can also define 2 preferred preset positions and let the PTZ camera move between 2 positions horizontally. With the PTZ surveillance camera, conference users can move the camera to a desired angle and talk face-to-face. This, apart from advanced PTZ features, is a top feature of the interactive surveillance camera:

Model	Viewable via web	Stream	Windows Client No.	Camera / Video	Zoom / Focus	Pan / Tilt	DI/DO	External Audio Input	Snapshot Transfer	Preset Position	Auto Pan / Auto Cruise	WiFi	Video Phone / SoftPhone Support
NSC3622	Yes	MPEG-4/ H.263 G.711 / G.729	10	CCD	Yes	manual	1/1	Yes	e-mail / FTP	Yes	Yes	No	Yes

Remote Surveillance and Management

Users can use the Microsoft Internet Explorer to access the embedded web server to remotely configure the surveillance camera setting. Ten client connections are permitted viewing access to the live video from anywhere in the world at anytime.

Security

The embedded web server offers 3 levels of group account administration with user password authentication. Different account group users are authorized different operation privileges. Users are able to choose different operations in line with the usage policy laid down by account management.

Motion Detection

Users can configure 3 regions of preference for motion detection. The sensitivity of each 'motion detection area' can be fine-tuned for best detection performance.

Event and Alarm Management


Event and alarm management includes motion detection and DICO device monitoring. Users can connect a tailor-made sensor device to the DI connector. The DO connector can connect to a tailor-made alarm siren. The motion detection or DICO event can trigger the surveillance camera to send a snapshot to FTP or an e-mail server for later reference. Windows client SMC can start to record video/audio when receiving an event signal from the camera (if the client is on line).

Snapshot and Video/Audio Recording

Bundled Windows client SMC offers manual, event and scheduler mode for video recording. The recorded video file provides a DVR-like control GUI. Diversified file playback includes play/stop/rewind/fast forward/pause/stop/step operation. Audio and video data is recorded in AVI format for easy access and playback.

Surveillance with 2-way Communication

The Leadtek surveillance camera integrates with the VoIP SIP feature to enables 2-way audio communication anywhere at anytime. The surveillance camera keeps you posted just as long as you're on the net.

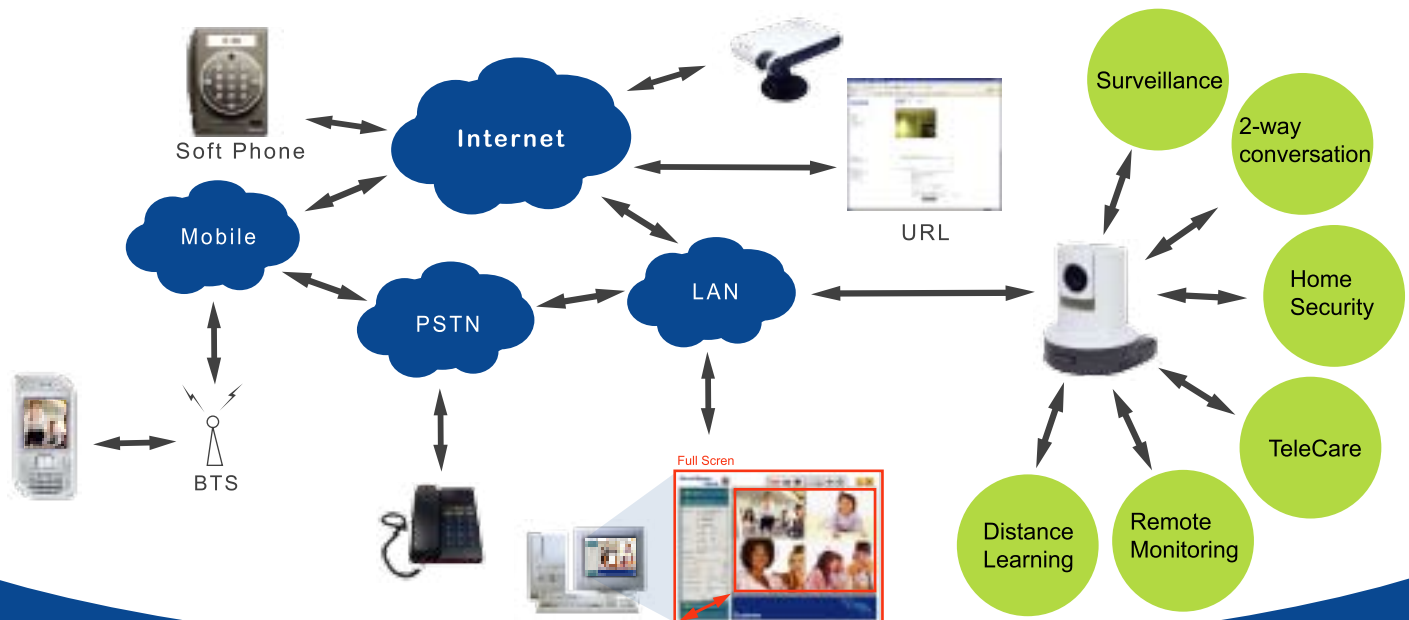

LEADTEK

No.VCT-000133_F.0

www.leadtek.com.tw Add : 18F 166 Chien-Yi Rd., Chung Ho City, Taipei County 23511, Taiwan Tel : +886 2 8226 5800 Fax : +886 2 8226 5801 E-Mail : ipcama_sales@leadtek.com.tw

